

(19) World Intellectual Property
Organization
International Bureau



29 APR 2005 533370




(43) International Publication Date
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number
WO 2004/042458 A1

- (51) International Patent Classification⁷: G02F 1/01, G02B 6/14, 6/12
- (21) International Application Number: PCT/US2003/034577
- (22) International Filing Date: 30 October 2003 (30.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/422,414 30 October 2002 (30.10.2002) US
60/478,751 16 June 2003 (16.06.2003) US
- (71) Applicants: MASSACHUSETTS INSTITUTE OF TECHNOLOGY [US/US]; 77 Massachusetts Avenue, Cambridge, MA 02139 (US). PIRELLI & C. S.p.A. [IT/IT]; Via Gaetano Negri, 10, 20123 Milano (IT).
- (71) Applicants and
(72) Inventors: CHERCHI, Matteo [IT/IT]; c/o Pirelli Labs S.p.A., Viale Sarca, 222, 20126 Milano (IT). WATTS, Michael, R. [US/US]; 2 Eastgate Lane, Hingham, MA 02043 (US).
- (72) Inventor: HAUS, Hermann, A. (deceased).
- (74) Agents: CONNORS, Matthew, E. et al.; Samuels, Gauthier & Stevens LLP, Suite 3300, 225 Franklin Street, Boston, MA 02110 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: AN INTEGRATED OPTIC POLARIZATION CONVERTER BASED ON STRUCTURAL CHIRALITY

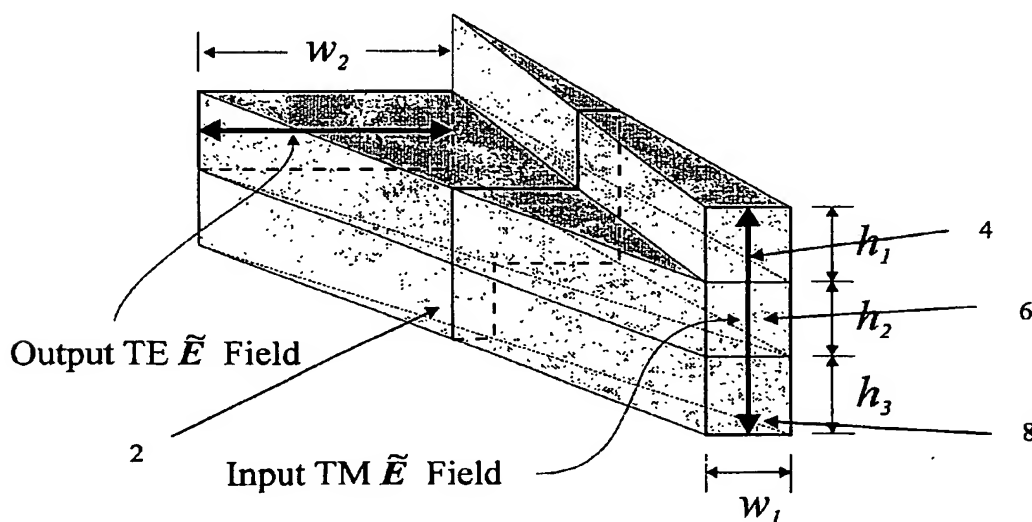

(57) Abstract: An integrated optic polarization converter includes a plurality of core layers used to approximate a gradually twisted waveguide and therein adiabatically transform a propagating mode from an initial polarization state to a different final polarization state.

WO 2004/042458 A1

AN INTEGRATED OPTIC POLARIZATION CONVERTER BASED ON STRUCTURAL CHIRALITY

PRIORITY INFORMATION

5 This application claims priority from provisional application Ser. Nos. 60/422,414 filed October 30, 2002, and 60/478,751 filed June 16, 2003, which are incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

10 The invention relates to the field of integrated optic polarization converters, and in particular to integrated optic polarization converters based on mode evolution or structural chirality.

 As the prevalence of fiber optic communication grows, the demand for more intricate processing of optical signals continues to increase. Since integrated optic
15 devices allow for integration of many optical functions on a chip, integrated optic approaches will likely fill the demand for more intricate optical signal processing. However, in order to improve the functionality and reduce the cost per function the density of components on the chip must increase.

 For a given wavelength, the confinement of a mode in a dielectric waveguide
20 is determined by the contrast between the core and cladding indices, the higher the contrast, the tighter the confinement. An outgrowth of tighter confinement is the ability to pack waveguides closer together and guide light around sharper bends without substantial radiative loss. Since these are the two most critical parameters affecting device density, it can generally be said that the higher the index contrast
25 the greater the device density. However, as the index contrast increases, the transverse electric (TE) and transverse magnetic (TM) modes propagating in the waveguides begin to exhibit different characteristics. While in a straight section of a square waveguide, the TE and TM modes propagate at the same rate, in a bend the TE and TM modes propagate at substantially different rates. And, when a pair of
30 square high index contrast (HIC) guides is coupled, the TE and TM modes tend to couple at different rates. Since most integrated optic components are sensitive to both propagation velocity and guide-to-guide coupling, these effects result in

polarization dependent performance, a result that is not compatible with the random polarization state emanating from the standard single mode fiber used in telecom applications.

One way to compensate these effects is to use a rectangular waveguide geometry and alter the aspect ratio of the guide to compensate for the natural difference in propagation around a bend and/or equalize the guide-to-guide coupling. However, while one or the other of these effects may be compensated in this manner for a particular device, as the index contrast increases it becomes difficult if not impossible to compensate both simultaneously in a manner that applies to all devices on the chip.

Another approach for overcoming the polarization sensitivity of HIC integrated optics is to split the random input polarization emanating from the single mode (SM) fiber with a polarizing beam splitter (PBS), couple the outputs to polarization maintaining (PM) fibers, twist one of these PM fibers by 90° degrees and couple the two fibers to separate paths on the integrated optic chip. On each of these paths identical structures are used to process the two components independently. At the output, these components are recombined by coupling to another pair of PM fibers, twisting the PM fiber of the path that had not previously been twisted and coupling both fibers to another PBS which has a SM fiber output. While such an approach, commonly referred to as a "polarization diversity" scheme, is feasible, when implemented with bulk optics it is also cumbersome. Aligning PM fibers is difficult and expensive. And, in order to preserve signal integrity the path lengths must be matched to within at least one-tenth of a bit length (i.e. ~2mm for 10Gb/s signals and ~0.5mm for 40Gb/s signals assuming an index of 1.5).

A better approach is to integrate the splitting function of the PBS and the rotating function of the twisted PM fiber onto the integrated optic chip. Doing so would eliminate the need to align PM fibers and path lengths could be matched easily through lithography.

Several integrated optic polarization splitters and rotators (or converters) have been proposed. However, most of the devices proposed to date rely on the coupling of a pair of waveguide modes. Devices based on coupled modes generally

exhibit a wavelength sensitivity resulting from differences in the dispersion of the super-modes propagating in the structure. Further, such approaches are very sensitive to fabrication errors. Even slight changes in the waveguide geometries or separation can have a significant impact on the device performance.

5 A better way to form a polarization splitter or rotator is to use the principle of mode evolution. By making gradual (or adiabatic) changes to the waveguide geometry, the modes in the guide can be conditioned and the polarization states separated or rotated. Such an approach only requires that the modes not exchange power which can be assured by proper design of the waveguide and a slow evolution
10 of the structure. Since prevention of mode coupling is a relatively loose requirement, devices based on mode evolution tend to be wavelength insensitive and fabrication tolerant. It has been proposed and demonstrated that a polarization splitter based on mode evolution can be formed, however, this approach has the disadvantage of requiring multiple waveguide materials. And, to date no
15 polarization converters have been proposed which utilize the principle of mode evolution.

Generally, it is the object of the invention to convert a TM input polarization to a TE output polarization or vice versa with an integrated optic device based on the principle of mode evolution or structural chirality.

20 It is yet another object of the invention that the device be wavelength insensitive, tolerant to fabrication errors, and require only a single material system to construct.

These and other objects of the present invention will become apparent to those skilled in the art from the following detailed description and accompanying
25 figures.

SUMMARY OF THE INVENTION

According to one aspect of the invention, there is provided an integrated optic polarization converter. The integrated optic polarization converter includes a
30 plurality of core layers used to approximate a gradually twisted waveguide and therein adiabatically transform a propagating mode from an initial polarization state to a different final polarization state.

According to another aspect of the invention, there is provided a method of forming an integrated optic polarization converter. The method includes receiving an initial polarization state. Also, the method includes forming a plurality of core layers to approximate a gradually twisted waveguide and therein adiabatically transform a propagating mode from the initial polarization state to a different final polarization state.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic diagram of a twisted waveguide;

10

FIG. 2 is a schematic diagram of a polarization converter using three adiabatically tapered core layers;

FIGS. 3A-3B are grayscale images of the fundamental mode electric field propagating in the waveguide of the invention;

15 FIG. 4 is a graph demonstrating the performance of a particular implementation of the device in FIG. 2 as a function of the device length;

FIG. 5 is a graph demonstrating the performance of a particular implementation of the device in FIG. 2 as a function of the wavelength of the electromagnetic field;

20 FIG. 6 is a schematic diagram of a polarization converter using three adiabatically tapered and separated core layers;

FIG. 7 is a schematic diagram of a polarization converter using adiabatic tapering of the middle layer and adiabatic separation of the upper and lower core layers;

25 FIG. 8 is a graph demonstrating the performance of a particular implementation of the device in FIG. 7 as a function of the device length;

FIG. 9 is a graph demonstrating the performance of a particular implementation of the device in FIG. 7 as a function of the wavelength of the electromagnetic field;

30 FIG. 10 is a schematic diagram of a polarization converter using only two layers that are adiabatically tapered and separated;

FIG. 11 is a graph demonstrating the performance of a particular implementation of the device in FIG. 10 as a function of the device length; and

FIG. 12 is a graph demonstrating the performance of a particular implementation of the device in FIG. 10 as a function of the wavelength of the electromagnetic field;

5

DETAILED DESCRIPTION OF THE INVENTION

The mode structure for a general rectangular dielectric waveguide consists of a minimum of two guided electromagnetic modes, a TE (or quasi-TE) mode and a TM (or quasi-TM) mode, and an infinite sum of unguided (or radiation) electromagnetic modes. If a rectangular waveguide is rotated by 90°, its mode structure is similarly rotated with the TE mode becoming the TM mode and vice-versa. Therefore, a smooth transition between a rectangular waveguide and its rotated counterpart should enable polarization conversion through mode evolution. However, any perturbation to the initial structure will induce coupling between the modes. For a mode evolution approach to work, power exchange between the modes must be inhibited.

A way to transition between a rectangular waveguide and its rotated counterpart is to twist the initial structure. FIG. 1 is a schematic diagram of an adiabatically twisted dielectric waveguide 100 having an input 102 and output 104. The twisting of the waveguide 100 acts as a perturbation to the mode structure of the rectangular guide inducing coupling amongst the guided modes and between the guided modes and radiation modes. Since coupling between guided and radiation modes requires strong perturbations, coupling to radiation modes can generally be ignored in slowly evolving structures. However, coupling amongst the guided modes remains an important effect.

If the waveguide 100 in FIG. 1 were square, the guided modes would be degenerate and therefore propagate at the same rate. The field coupling induced by the twist would add coherently along the length of the structure and the power exchange between the modes would be substantial. This would be an undesirable result, as the twisted waveguide 100 is meant to work on the principle of mode evolution rather than mode coupling. To inhibit the coupling, a rectangular waveguide with a large aspect ratio is used so that the guided modes will propagate at different rates. In this case, the power coupled from one mode to the other along

the length of the structure will add incoherently as long as the structure is sufficiently long to allow the modes to de-phase. As the index contrast, aspect ratio, and length of the transition increase, the degree of incoherence also increases and the accumulated power exchange along the length of the structure can be made
5 arbitrarily low. The performance departs from ideality only when the transition becomes too short or the aspect ratio of the guide too small to allow for de-phasing to occur.

The structure 100 in FIG. 1 is an ideal structure with a perfect twist of the waveguide. However, for practical implementation of the device all such
10 geometries should be formed from micro-fabrication techniques, which generally require the structures be formed from a layering process with features defined through lithography. It is therefore desirable to approximate this twisted waveguide with a finite number of layers. Herein, a layer is defined as a horizontal slice through the waveguide cross-section which contains no variations of refractive index
15 in the vertical direction.

An optical waveguide is typically formed by dielectric materials of various refractive indices. Generally, the higher index materials are considered core materials while the lower index materials are considered cladding materials. To be specific, a cladding material is herein defined as the material of lowest refractive
20 index within a layer. All other materials within the layer are therefore core materials. A core layer is defined as a layer containing a core material.

The basic requirements for the structure to operate as a polarization converter are quite loose, with the primary requirement being that the structural chirality, or twist in the electromagnetic sense, be preserved. A few of the possible
25 geometries are described below.

FIG. 2 is a schematic diagram of an integrated optic polarization converter 2 using three core layers 4, 6, and 8 with heights h_1 , h_2 , and h_3 , respectively, to approximate a twisted waveguide and transform the structure from a vertically aligned rectangular waveguide to a horizontally aligned rectangular waveguide. In
30 the described embodiment, each of the layers 4, 6, and 8 have a width of w_1 at the input. At the output of the structure 2 the waveguide width is w_2 , which is approximately equivalent to the sum of the heights h_1 , h_2 , and h_3 . The height at the

output is that of the middle layer h_2 . However, the geometry of the structure may vary depending on the requirements of the application.

A cladding, with a lower refractive index than the core layers, is typically arranged around the core layers to provide light confinement.

5 The transition is achieved by removing material from the upper 4 and lower 8 core layers and adding material to the middle core layer 6 in a manner approximating a rotation of the waveguide axis.

FIGs. 3A-3B are grayscale images of the fundamental mode field propagating in the inventive waveguide. FIG. 3A depicts a grayscale image of the
10 \hat{x} component of the fundamental mode electric field profile for the starting 10, middle 12 and ending 14 structures. FIG. 3B depicts a grayscale image of the \hat{y} component of the fundamental mode electric field profile for the starting 16, middle 18 and ending 20 structures.

From the mode profiles, it is shown that the mode is initially polarized along
15 the \hat{y} direction, but mid-point along the structure the mode field components are somewhat evenly split, and at the end of the structure the mode is polarized primarily along the \hat{x} direction. Coupled local mode theory dictates that an adiabatic transition between these structures enables mode conversion from the \hat{y} polarized state in the initial guide to the \hat{x} polarized state in the final guide 2. Since
20 both the primary and secondary modes are transformed, the inverse is also true. That is a \hat{x} polarized state in the initial guide will generally be transformed to a \hat{y} polarized state in the final guide. Additionally, the principle of reciprocity ensures that the device operates in reverse. That is, \hat{x} and \hat{y} polarized states starting from the end of the structure will be adiabatically transformed into \hat{y} and \hat{x} polarized
25 states at the beginning of the structure, respectively.

FIG. 4 is a graph demonstrating the performance of a particular implementation of the converter depicted in FIG. 2 as a function of the structure length. In this embodiment, $h_1 = h_2 = h_3 = w_1 = 0.25 \mu\text{m}$, $w_2 = 0.75 \mu\text{m}$, the core index is 2.2 and the cladding index is 1.445, and the transition is linear along
30 the direction of propagation \hat{z} , however, in other embodiments these parameters can vary and non-linear transitions may be utilized. A three-dimensional mode scattering formulation was used to perform the simulation and the wavelength

considered was $1.55\ \mu\text{m}$. Mode scattering simulations are a particularly accurate modeling tool when only a few modes per waveguide cross-section are required to represent the system. Since the radiation modes do not substantially influence the operation of approaches based on mode evolution, the mode-scattering technique is well suited for these problems. Additionally, the results presented were confirmed at a few device lengths with full three dimensional finite difference time domain (FDTD) simulations. The FDTD method is a complete numerical implementation of Maxwell's Equations. The results of the mode scattering simulation presented in FIG. 4 show that 99% or more of the power is transferred successfully from a TM polarization to a TE polarization with taper lengths of only a couple hundred microns. As was hypothesized for a guide with a pure twist, it is found that when the taper is too short, and thus the perturbation too strong to allow for the modes to de-phase, the guided modes exchange power and the device performance degrades leaving power in the TM polarized state.

FIG. 5 is a graph demonstrating the broadband performance of the particular embodiment considered in FIG. 4 when the device length is set to $200\ \mu\text{m}$. Here again, a three-dimensional mode scattering formulation was used to perform the simulation. FIG. 5 shows that no wavelength sensitivity is discernable over the entire $1.45\ \mu\text{m}$ to $1.65\ \mu\text{m}$ regime; a wavelength span of interest for telecommunications. The broadband performance of the approach is consistent with the underlying theory of operation. Since the aim is to transition modes from one state to another without introducing coupling amongst the modes, the bandwidth is only limited by the extent to which the coupling amongst the modes is increased at one wavelength relative to another. At short wavelengths the appearance of additional modes may facilitate this coupling and at long wavelengths the modes become more closely phase-matched thereby reducing the primary effect, which inhibits coupling between the modes. In either case, large changes in wavelength are required for these phenomena to take effect. This is in contrast to approaches based on coupled modes that suffer from an inherent bandwidth limitation associated with differences in the dispersion of the super-modes.

Many variations of the basic structure are possible. Both the geometry and refractive indices may differ from the particular embodiment described.

FIG. 6 is a schematic diagram of another embodiment of the inventive polarization converter 24. Fabrication limitations may prevent the upper 26 and lower 28 layers from reaching infinitesimal widths smoothly. Therefore, it may be advantageous to consider structures where the final transition is handled by separating the upper 26 and lower 28 layers from the middle layer 30, as shown in FIG. 6. This results in a nearly equivalent adiabatic transition to the final output waveguide.

The structure 24 is designed so that initially the upper layer 26, middle layer 30, and lower layer 28 will have heights of h_1 , h_2 , and h_3 respectively. Moreover, each of the layers 26, 28, and 30 will have a width of w_1 at the input. Note at the output of the structure 24 the width is w_2 , which is approximately equivalent to the sum of the heights h_1 , h_2 , and h_3 . The height at the output is that of the middle layer h_2 .

A cladding, with a lower refractive index than the core layers, is typically arranged around the core layers to provide light confinement.

FIG. 7 is a schematic diagram of another embodiment of the inventive polarization converter 32 similar in nature to that of FIG. 6. However, here the upper 34 and lower 38 layers are in fact not tapered at all, but rather gradually separated from the middle layer 36. In this manner the minimum feature size can be made even larger thereby further facilitating the ease of fabrication. The upper 34 and middle 36 layers are separated at the output by a distance s , and the middle 36 and lower 38 layers are separated at the output by a distance s .

The structure 32 is designed so that initially the upper layer 34, middle layer 36, and lower layer 38 will have heights of h_1 , h_2 , and h_3 respectively. Moreover, each of the layers 34, 36, and 38 will have a width of w_1 . Note at the output of the structure 32 the width is w_2 , which is approximately equivalent to the sum of the heights h_1 , h_2 , and h_3 . The height at the output is that of the middle layer h_2 .

A cladding, with a lower refractive index than the core layers, is typically arranged around the core layers to provide light confinement.

FIG. 8 is a graph demonstrating the performance of a particular embodiment of the polarization converter depicted in FIG. 7 as a function of the structure length. In this embodiment, the parameters were set as follows $h_1 = h_2 = h_3 = 0.25\mu\text{m}$, w_1

$= 0.25 \mu\text{m}$, $w_2 = 0.75 \mu\text{m}$, $s = 0.125 \mu\text{m}$ and the core and cladding indices are 2.2 and 1.445, respectively. In other embodiments, these parameters can vary. Again, a three-dimensional mode scattering formulation was used to perform the simulation and the wavelength considered was $1.55 \mu\text{m}$. Performance similar to that of the original embodiment is obtained with device lengths of only a couple hundred microns.

FIG. 9 is a graph demonstrating the broadband performance of the particular embodiment considered in FIG. 7 when the structure length is set to $100 \mu\text{m}$. Here again, a three-dimensional mode scattering formulation was used to perform the simulation. FIG. 5 shows that no wavelength sensitivity is discernable over the entire $1.45 \mu\text{m}$ to $1.65 \mu\text{m}$ regime.

Although three layers are the minimum required for the device to be symmetric, any of the aforementioned approaches may be applied to a device composed of only two core layers. FIG. 10 is a schematic diagram of a polarization converter 40 using only two core layers 42, 44. In this embodiment, the upper 42 and lower 44 layers are both tapered and separated simultaneously.

The polarization converter 40 is designed so that initially the upper layer 42 and lower layer 44 will have heights of h_1 and h_2 , respectively. Moreover, each of the layers 42 and 44 will have a width of w_1 at the input. At the output, the width of the upper layer is w_3 . Note that at the output of the chiral waveguide structure 40 the width is w_2 , which is approximately equivalent to the sum of the heights h_1 and h_2 . The height at the output is that of the middle layer h_2 . The performance of the device is unaffected by the ordering of the layers (i.e. which layer sits on top).

A cladding, with a lower refractive index than the core layers, is typically arranged around the core layers to provide light confinement.

FIG. 11 is a graph demonstrating the performance of a particular embodiment of the structure depicted in FIG. 10 as a function of the structure length. In this embodiment, the parameters are set as follows; $h_1 = h_2 = 0.4 \mu\text{m}$, $w_1 = 0.4 \mu\text{m}$, $w_2 = 0.8 \mu\text{m}$, $w_3 = 0.25 \mu\text{m}$, $s = 0.25 \mu\text{m}$, and the core and cladding indices are 2.2 and 1.445, respectively. In other embodiments, these parameters can vary. Again, a three-dimensional mode scattering formulation was used to perform the simulation and the wavelength considered was $1.55 \mu\text{m}$. Despite the

asymmetry inherent to the two layer embodiment, the structure performs quite well with over 99% of the power transferred from the TM polarization to the TE polarization for structures of only a couple hundred microns in length.

FIG. 12 is a graph demonstrating the broadband performance of a 100 μm long implementation of the embodiment used for the simulation in FIG. 11. Again, a three-dimensional mode scattering formulation was used to perform the simulation. FIG. 12 shows that no wavelength sensitivity is discernable over the entire 1.45 μm to 1.65 μm regime.

Although the present invention has been shown and described with respect to several preferred embodiments thereof, various changes, omissions and additions to the form and detail thereof, may be made therein, without departing from the scope of the invention.

What is claimed is:

CLAIMS

- 1 1. An integrated optic polarization converter comprising a plurality of core layers
2 used to approximate a gradually twisted waveguide and therein adiabatically
3 transform a propagating mode from an initial polarization state to a different final
4 polarization state.
- 1 2. The polarization converter of claim 1 wherein at least one of said core layers is
2 tapered linearly along the length of the polarization converter.
- 1 3. The polarization converter of claim 1 wherein at least one of said core layers is
2 tapered non-linearly along the length of the polarization converter.
- 1 4. The polarization converter of claim 1, wherein said plurality of core layers
2 comprises two core layers.
- 1 5. The polarization converter of claim 1, wherein said plurality of core layers
2 comprises three core layers.
- 1 6. The polarization converter of claim 1, wherein a certain number of said core
2 layers is maintained constant along the length of the polarization converter.
- 1 7. The polarization converter of claim 1, wherein said core layers are separated
2 laterally along the length of the polarization converter.
- 1 8. A method of using an integrated optic polarization converter, said method
2 comprising:
 - 3 receiving an initial polarization state; and
 - 4 forming a plurality of core layers to approximate a gradually twisted
 - 5 waveguide and therein adiabatically transform a propagating mode from said
 - 6 initial polarization state to a different final polarization state.
- 1 9. The method of claim 8 wherein at least one of said core layers is tapered linearly
2 along the length of the polarization converter.
- 1 10. The method of claim 8 wherein at least one of said core layers is tapered non-
2 linearly along the length of the polarization converter.

1 11. The method of claim 8, wherein said plurality of core layers comprises two
2 core layers.

1 12. The method of claim 8, wherein said plurality of core layers comprises three
2 core layers.

1 13. The method of claim 8, wherein a certain number of said core layers is
2 maintained constant along the length of the converter.

1 14. The method of claim 8, wherein said core layers are separated laterally along
2 the length of the polarization converter.

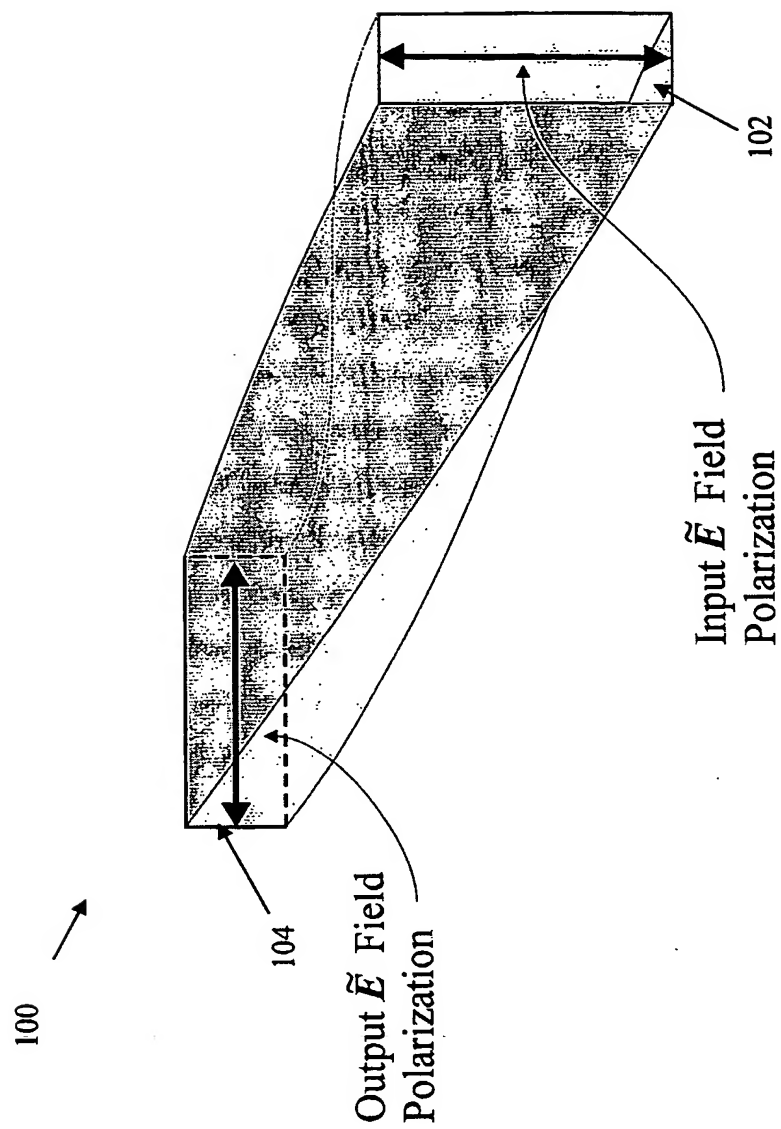


FIG. 1

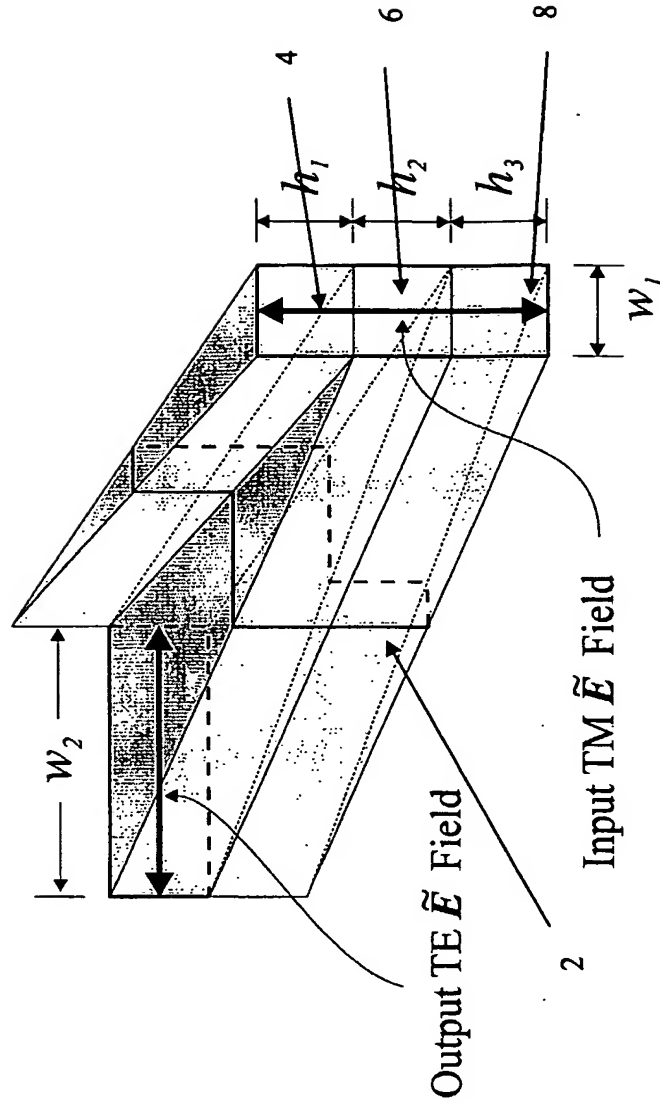
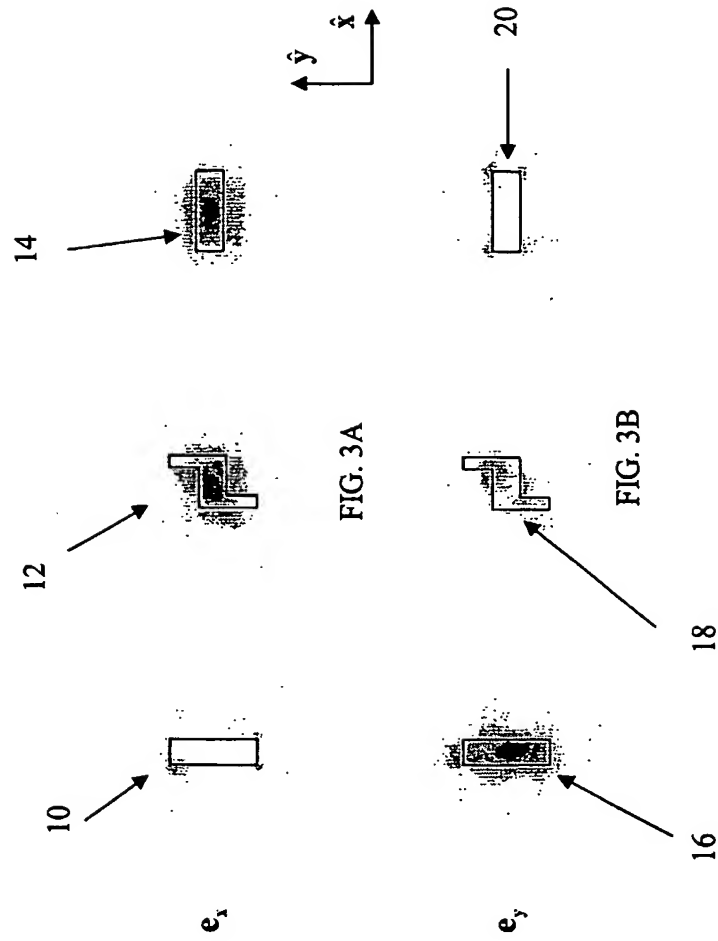


FIG. 2



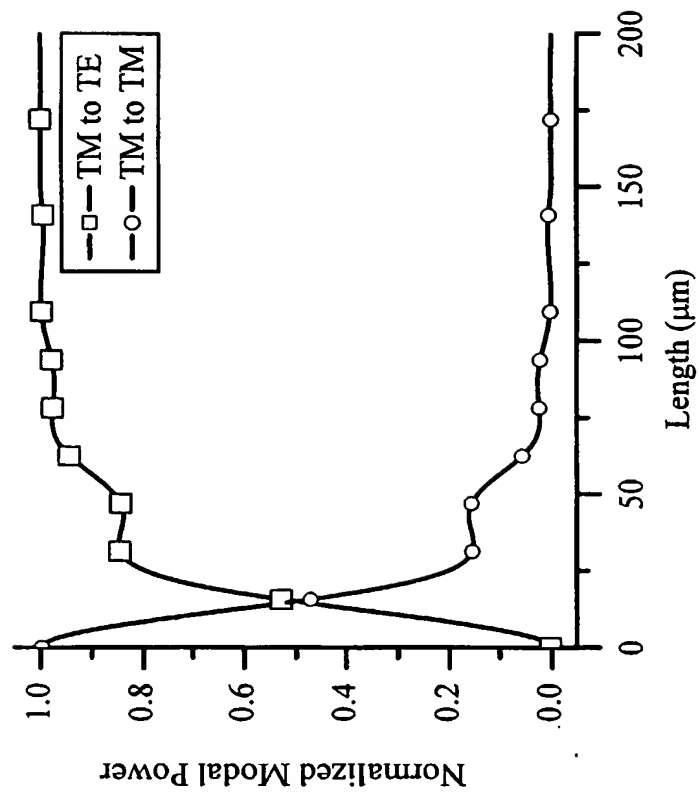


FIG. 4

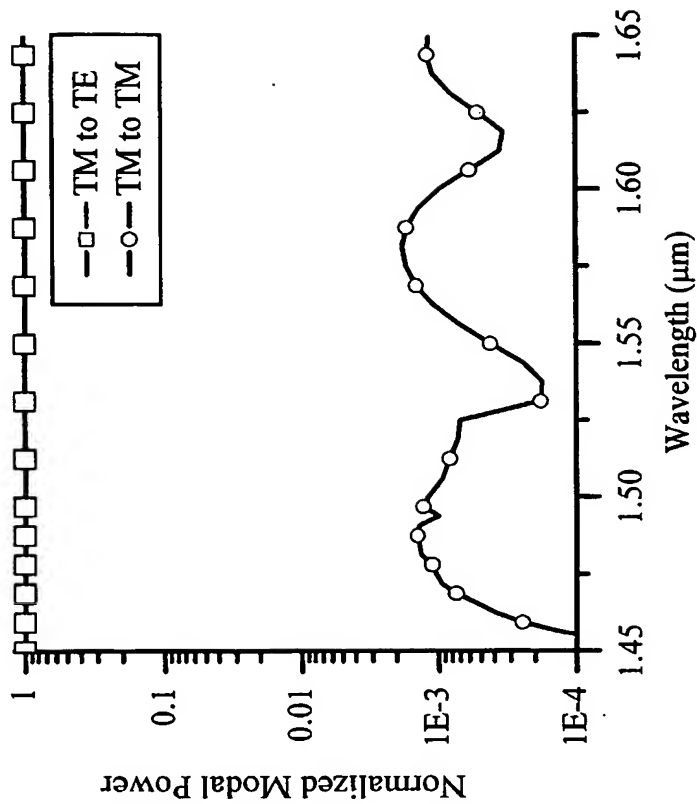


FIG. 5

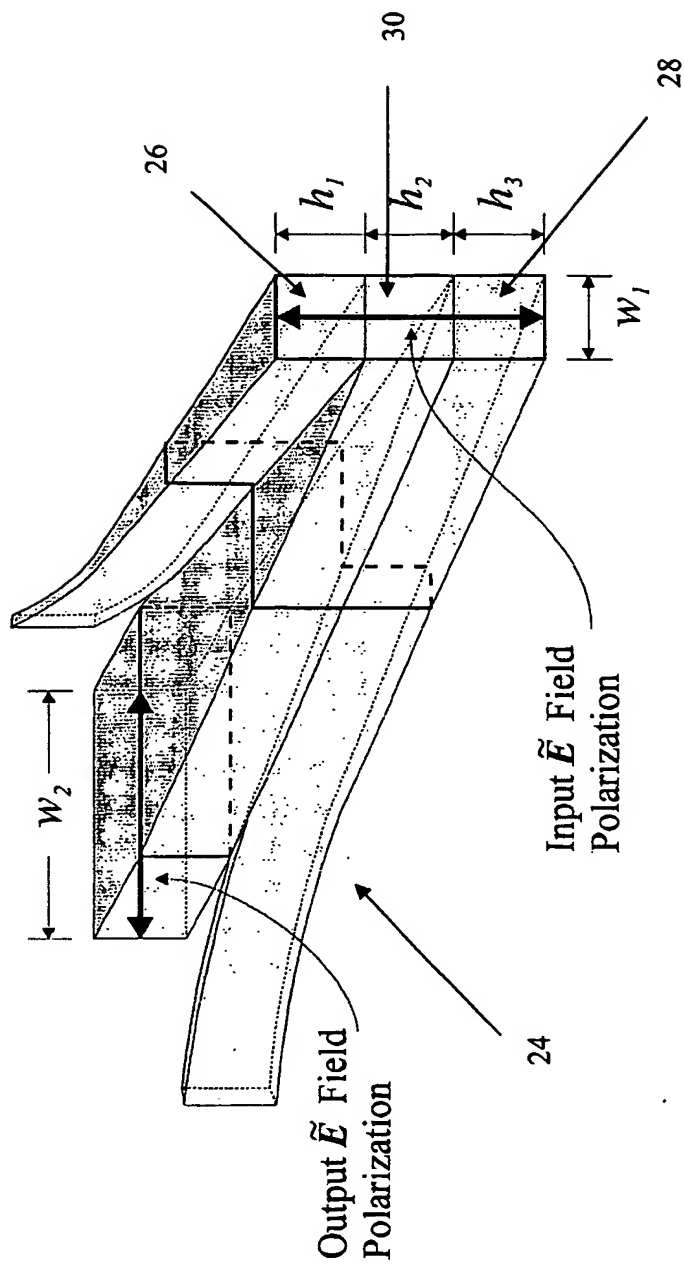


FIG. 6

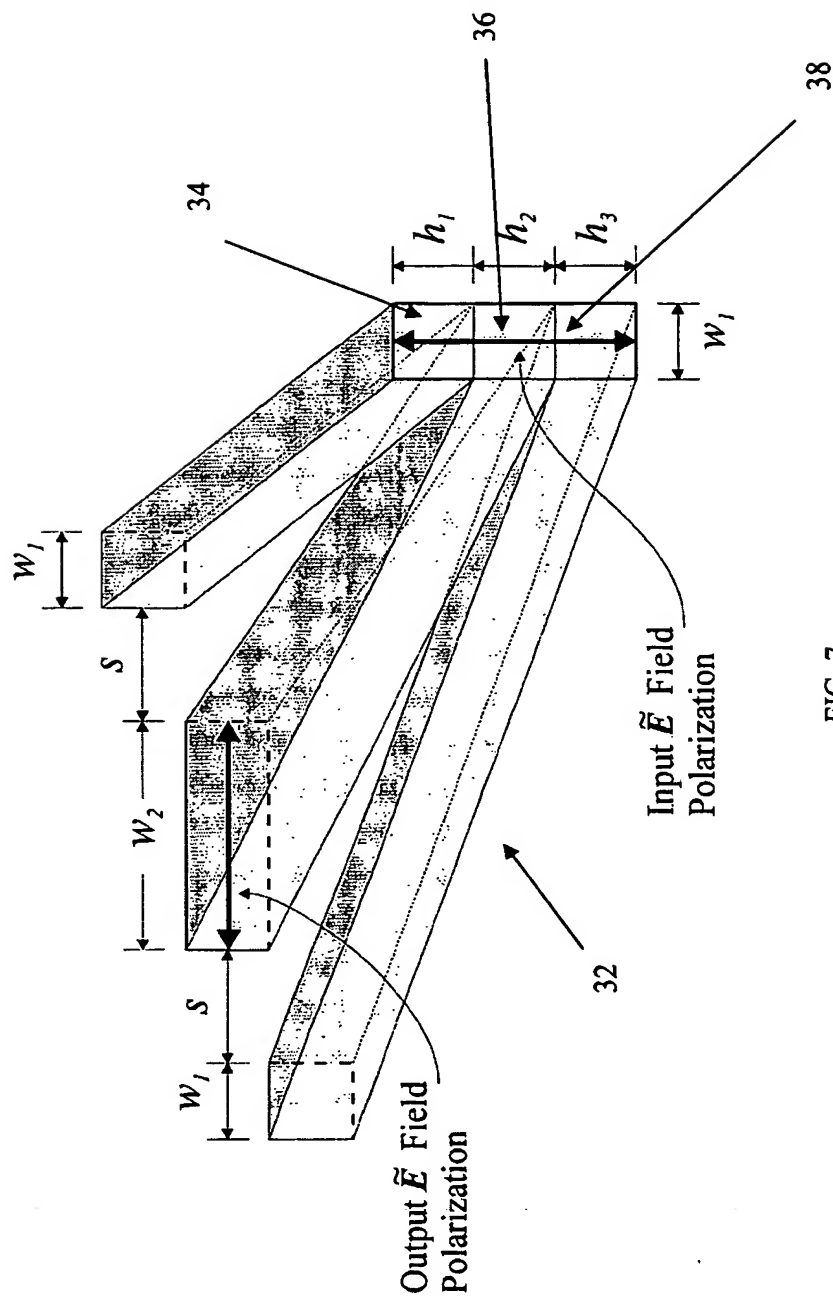


FIG. 7

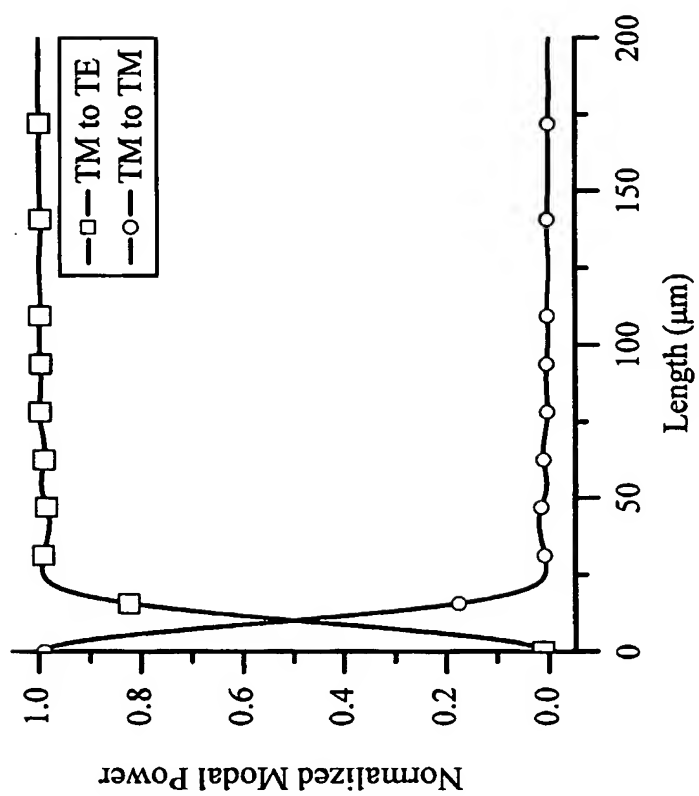


FIG. 8

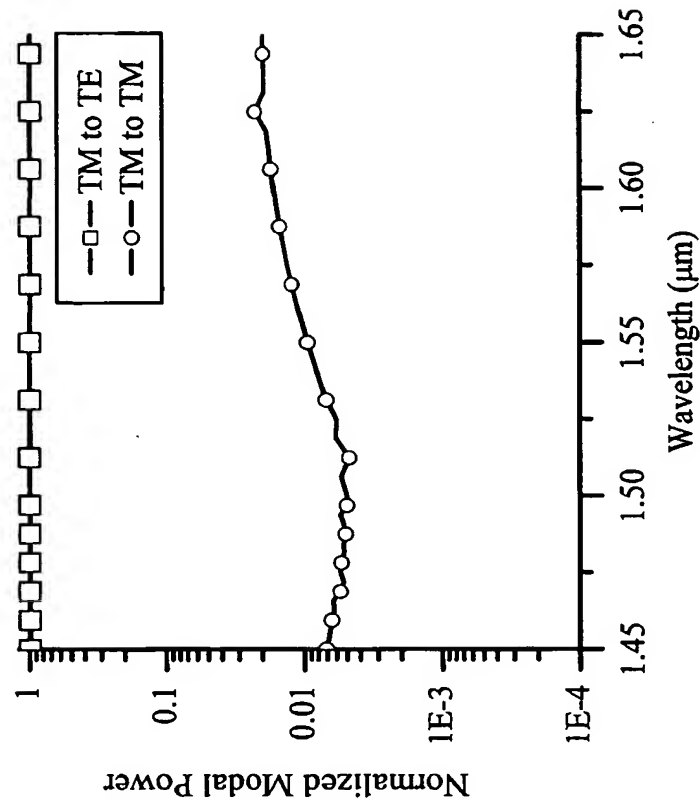


FIG. 9

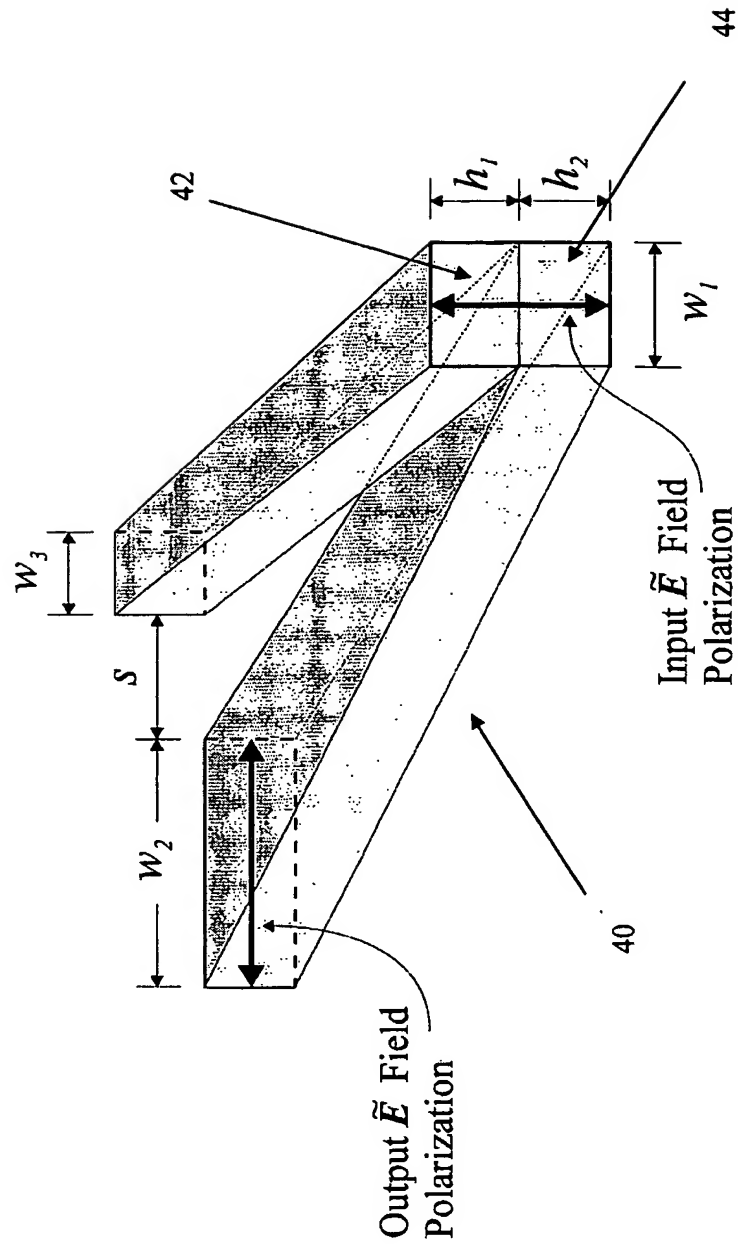


FIG. 10

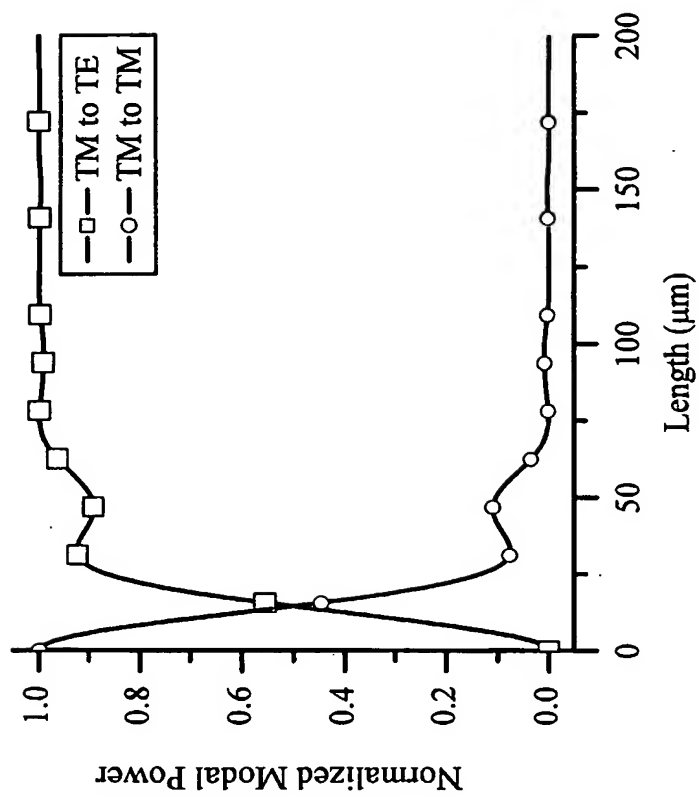


FIG. 11

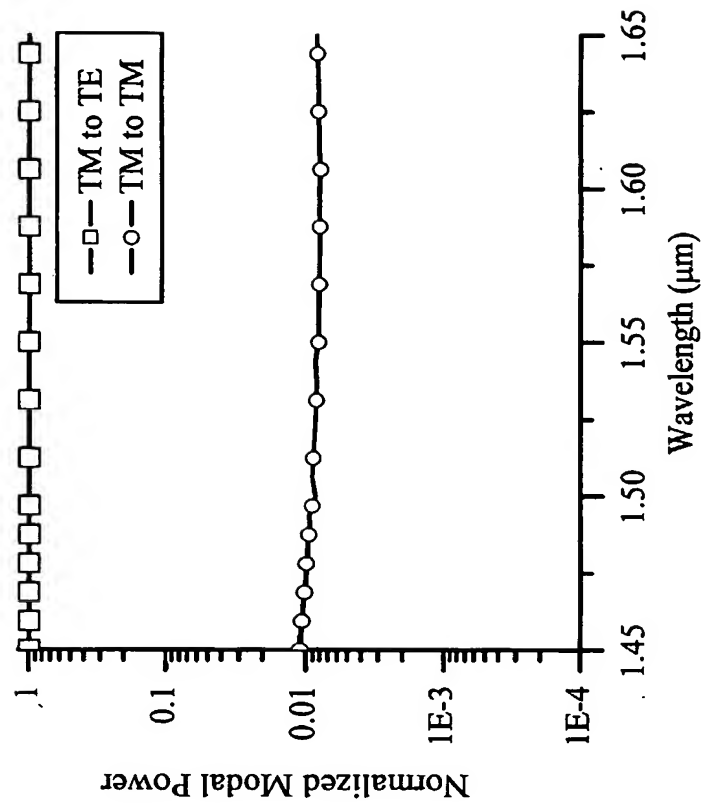


FIG. 12

INTERNATIONAL SEARCH REPORT

International Search No.

PCT/US 03/04577

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02F1/01 G02B6/14 G02B6/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02F G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	MIN-CHEOL OH ET AL: "SIMULATION OF POLARIZATION CONVERTER FORMED BY POLING-INDUCED POLYMER WAVEGUIDES" IEEE JOURNAL OF QUANTUM ELECTRONICS, IEEE INC. NEW YORK, US, vol. 31, no. 9, 1 September 1995 (1995-09-01), pages 1698-1704, XP000526179 ISSN: 0018-9197 the whole document	1, 4-6, 8, 11-13
A	US 4 998 793 A (HENRY CHARLES H ET AL) 12 March 1991 (1991-03-12) the whole document	1-14
A	US 5 225 797 A (LEE CHARLES A ET AL) 6 July 1993 (1993-07-06) the whole document	1-14
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

5 March 2004

Date of mailing of the international search report

16/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Ammerlahn, D

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 03/34577

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 418 867 A (VAN DER TOL JOHANNES J G M) 23 May 1995 (1995-05-23) the whole document</p> <p>-----</p>	1-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Search No

PCT/US 03/54577

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4998793	A	12-03-1991	DE 69023028 D1	23-11-1995
			DE 69023028 T2	30-05-1996
			EP 0389172 A2	26-09-1990
			HK 34196 A	08-03-1996
			JP 2275402 A	09-11-1990
			JP 2644060 B2	25-08-1997
US 5225797	A	06-07-1993	NONE	
US 5418867	A	23-05-1995	NL 9300204 A	01-09-1994
			EP 0609926 A1	10-08-1994
			JP 3020129 B2	15-03-2000
			JP 6242334 A	02-09-1994